

REVISED VERSION

22 SEP 2004

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
9 October 2003 (09.10.2003)

PCT

(10) International Publication Number  
**WO 2003/082407 A1**

(51) International Patent Classification<sup>7</sup>: A62C 39/00, 5/00

City Gate, 95-107 Southampton Street, Reading, Berkshire  
RG1 2QW (GB).

(21) International Application Number:

PCT/GB2003/001394

(74) Agent: MATHISEN & MACARA; The Coach House,  
6-8 Swakeleys Road, Ickenham, Uxbridge UB10 8BZ  
(GB).

(22) International Filing Date: 28 March 2003 (28.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0207466.4 28 March 2002 (28.03.2002) GB

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,  
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): KIDDE  
IP HOLDINGS LIMITED [GB/GB]; Mathisen Way,  
Colnbrook, Slough SL3 0HB (GB).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): DUNSTER, Robert,  
George [GB/GB]; 34 Royston Way, Burnham, Slough,  
Buckinghamshire SL1 6ER (GB). DAVIES, Simon, James  
[GB/GB]; 2 Silverdale Court, Leacroft, Staines, Middlesex  
TW18 4NT (GB). LADE, Robert, James [GB/GB]; 4

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: FIRE AND EXPLOSION SUPPRESSION

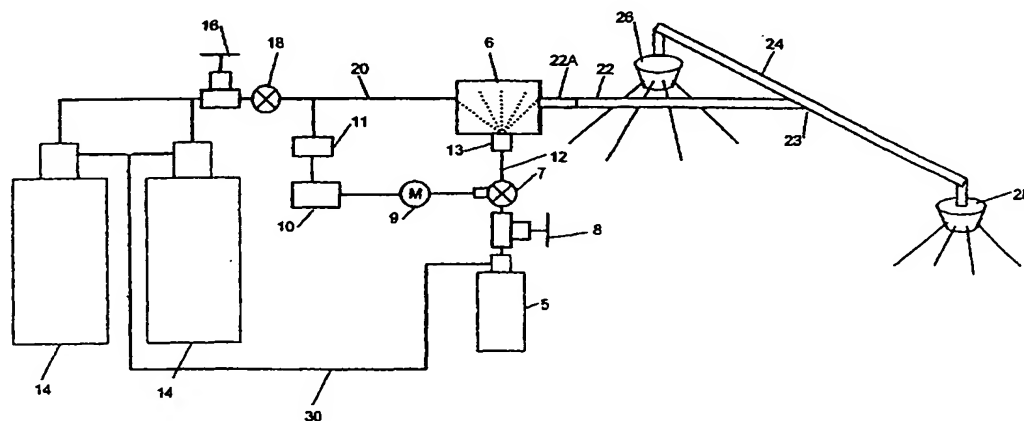

(57) Abstract: A fire and explosion suppression system comprises a source (5) of high pressure water which is fed to a misting nozzle (13) at one input of a mixing unit (6), and a source (14) of high pressure inert gas, such as nitrogen, which is fed along a pipe (20) to another input of the mixing unit (6). Inside the mixing unit (6), water mist, in the form of an atomised mist of very small droplet size is mixed with the pressurised gas and exits the mixing unit (6) at high pressure and high velocity along a pipe (22) and is thence discharged through spreaders (26, 28). The source (5) of the water is pressurised by a feed (30) from the source of pressurised inert gas. The mass flow rate of the water will therefore reduce as the pressure of the gas decays. This tends to maintain the ratio of the mass flow rate of the water to the mass flow rate of the gas constant. This is found to produce and maintain an advantageous distribution of droplet size in the discharged mist. A control unit (10) adjusts a metering valve (7) in dependence on the mass flow rate or the pressure of the gas in order to adjust the ratio as necessary to maintain its value constant.

WO 2003/082407 A1



**Published:**

— *with international search report*

**(15) Information about Correction:**

see PCT Gazette No. 11/2004 of 11 March 2004, Section II

**(88) Date of publication of the revised international search  
report:**

11 March 2004

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*